



Compatible Firmware Update Guide for M300 RTK and M350 RTK

Contents

Read Before Using this Guide	2
Firmware Update Guide	2
Warnings for Updating to a Compatible Firmware Version	2
Device Update Sequence Requirements	2
Device Update Method List	2
Aircraft and Remote Controller	2
DJI Payload	3
Battery Station	4
Battery	4
DA2 Offline Update Steps	4

Read Before Using this Guide

This guide is intended to explain the compatibility between the aircraft (M300 RTK, M350 RTK) and the DJI payloads, remote controller (DJI Smart Controller Enterprise, DJI RC Plus remote controller), Intelligent Battery Station (BS60, BS65) and Intelligent Flight Batteries (TB60, TB65), and how to update them to a compatible firmware version.

Firmware Update Guide

Warnings for Updating to a Compatible Firmware Version

-
- ⚠️ • Make sure to follow the “Device Update Sequence Requirements” and the device combinations, compatible firmware version and update method requirements in the “Device Update Method List” to perform the firmware update **to avoid the situation where the device is permanently unusable.**
 - When using the DJI Assistant 2 (abbreviated as DA2) to update the firmware, make sure to download the DJI Assistant 2 (Enterprise Series) of v2.1.9 or above from the DJI official website.
 - The “Compatible Firmware Version” in this document refers to the version to be updated, and the “Update Method” refers to the method that must be used to update the devices to the corresponding compatible firmware version.
-
- 💡 • Hereinafter, M300 RTK and M350 RTK aircraft will be abbreviated as M300 RTK and M350 RTK, DJI Smart Controller Enterprise will be abbreviated as Smart Controller, the Intelligent Battery Station will be abbreviated as Battery Station, and the Intelligent Flight Battery will be abbreviated as Battery.
 - After the aircraft, remote controller, DJI payload, battery station, and battery have been updated to a compatible firmware version or above using this guide, the users can read the M350 RTK and M300 RTK Accessory Compatibility List for combination and use, and the further firmware update method will not be limited by the update method described in this guide.
-

Device Update Sequence Requirements

Make sure to perform the device update in the following order:

Remote Controller > Aircraft > DJI Payload > Battery Station > Battery

Device Update Method List

Aircraft and Remote Controller

-
- ⚠️ • The aircraft and the remote controller must be updated to a compatible firmware version before using them together.
 - When updating, the batteries installed onto the aircraft need to be a pair of TB65 or TB60. **DO NOT** use TB65 and TB60 together.
-

Device Combinations	Device	Compatible Firmware Version	Update Method
M300 RTK + RC Plus ^[1]	M300 RTK	v57.00.01.00	DA2 Offline Update
	RC Plus	v01.02.04.40	App Update All / App Offline Update / DA2 Firmware Update
M350 RTK + RC Plus	M350 RTK	v07.00.00.01	App Update All / App Offline Update / DA2 Firmware Update
	RC Plus	v01.02.04.40	App Update All / App Offline Update / DA2 Firmware Update
M300 RTK + Smart Controller ^[2]	M300 RTK	v07.00.01.00	App Update All / App Offline Update / DA2 Firmware Update
	Smart Controller	v07.00.01.00	App Update All / App Offline Update / DA2 Firmware Update

- [1] The aircraft of M300 RTK + RC Plus combination must use the DA2 Offline Update for the first time to update, read DA2 Offline Update Steps to perform the firmware update. After the compatible firmware update is completed, the further update of the M300 RTK + RC Plus combination can be updated using App Update All / App Offline Update / DA2 Firmware Update.
- [2] After the M300 RTK is updated to a compatible firmware version that supports RC Plus, it cannot be linked or used with a Smart Controller. Once the Smart Controller needs to be used again, the user must use the DA2 Offline Update method to update the M300 RTK firmware to v07.00.01.00 version.

DJI Payload




- When installing a DJI payload to the aircraft of an aircraft and remote controller combination, make sure to use the update method for the corresponding combination when updating to a compatible firmware version. After the compatible firmware update is completed, the DJI payload can be updated with any combination of the aircraft and remote controller using App Update All or SD Card Update.

DJI Payload	Compatible Firmware Version	M300 RTK + RC Plus	M350 RTK + RC Plus	M300 RTK + Smart Controller
H20 / H20T / H20N ^[1]	v07.00.01.05	SD Card Update	SD Card Update	Update All / SD Card Update
P1 / L1 ^[1]	v07.00.01.10	SD Card Update	SD Card Update	Update All / SD Card Update
Skyport V2 ^[2]	v01.03.05.00	DA2 Firmware Update	Update not supported	DA2 Firmware Update
X-Port ^[2]	v01.03.05.01	DA2 Firmware Update	Update not supported	DA2 Firmware Update

- [1] When updating the gimbal cameras (such as H20, H20T, H20N, P1, and L1) to compatible firmware versions, make sure to get the offline firmware package from the Download page of the corresponding gimbal camera on the DJI official website, and update the gimbal camera using the SD Card Update method by reading the corresponding user manual.
- [2] After Skyport V2 or X-Port are updated to a compatible version, the further update can be performed with the M350 RTK and RC Plus combination.


Battery Station

-  • RC Plus needs to be updated to v01.02.04.40 before supporting to update the firmware for the BS65 and the BS60. **Make sure to update the RC Plus firmware first to avoid the situation where the battery station is permanently unusable.**

Battery Station	Compatible Firmware Version	RC Plus	Smart Controller
BS65 ^[1]	v07.00.00.01	Battery Station update is available by connecting to the remote controller	Battery Station update is available by connecting to the remote controller
BS60	v07.00.00.01	Battery Station update or use is unavailable by connecting to the remote controller	Battery Station update is available by connecting to the remote controller

- [1] When updating the BS60 to a compatible firmware version, DO NOT insert TB65 batteries into the battery station. Only after being updated to v07.00.00.01, the BS60 can support the charging and updating of the TB65 batteries.

Battery



-  • In addition to the update methods in the table below, the battery is also supported to be installed in the aircraft for consistent firmware updates. DO NOT use the TB65 and the TB60 together in the aircraft.


Battery	Compatible Firmware Version	BS65 Battery Station	BS60 Battery Station
TB65 ^[1]	v09.03.00.39	Batch battery update is available	Batch battery update is available
TB60	v01.02.05.44	Batch battery update is available	Batch battery update is available

- [1] The TB65 battery can only be used when the firmware of the M300 RTK is v07.00.01.00 or above. Otherwise, there will be flight safety risks.

DA2 Offline Update Steps

1. Go to the official DJI website of M300 RTK (<https://enterprise.dji.com/matrice-300/downloads>), and download the aircraft offline firmware package of v57.00.01.00.
2. Connect the aircraft to a computer separately, as the DJI Assistant 2 does not support updating multiple DJI devices at the same time.
3. Make sure the computer is connected to the internet and the DJI device is powered on with a battery level higher than 25%.
4. Launch DJI Assistant 2 of v2.1.9 and log in with a DJI account. (M300 RTK does not support the Mac version, a computer with Windows system is required)
5. Click the Offline Update button on the left side.
6. Select the offline firmware package with the correct version downloaded in Step 1 and click to update. The firmware will be updated automatically.
7. When the Update successful prompt appears, the update is completed.

8. After updating, power on the DJI RC Plus remote controller, run DJI Pilot 2, and tap  on the homepage to select MATRICE 300 RTK to link the remote controller to M300 RTK.
9. After linking, go to the upper left corner of the DJI Pilot 2 homepage, tap  Data and Privacy > Clear DJI Device Log > Select Device > Select the aircraft (DO NOT select the remote controller) > Confirm that the aircraft is selected, and then Clear Selected Device Data. After clearing data, RC Plus can be used with M300 RTK.

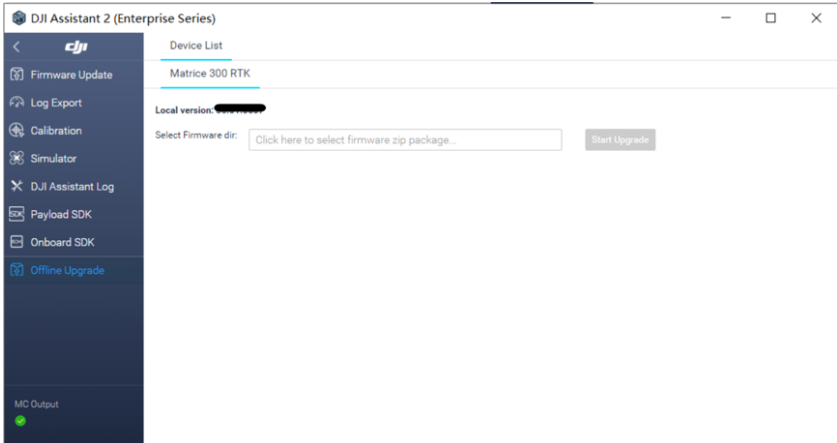

WE ARE HERE FOR YOU



Contact
DJI SUPPORT

This content is subject to change.



<https://enterprise.dji.com/matrice-350-rtk/downloads>

If you have any questions about this document, please contact DJI by sending a message to DocSupport@dji.com.

DJI and MATRICE are trademarks of DJI.
Copyright © 2023 DJI All Rights Reserved.